


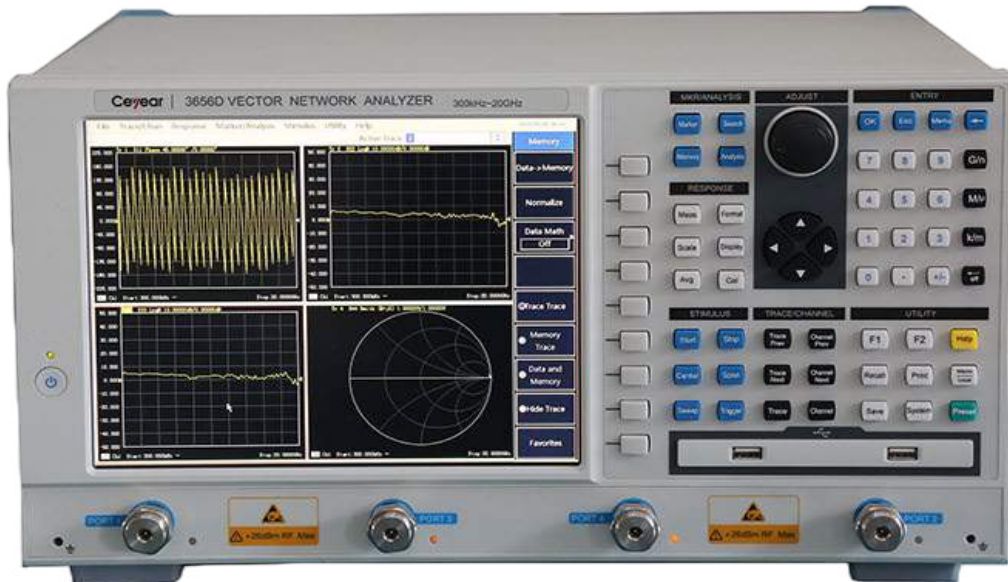

MAXWELLON 3656

100kHz~3GHz/6.8GHz/8.5GHz/300kHz~20GHz
Vector Network Analyzer
2023


3656A/BA/B/D vector network analyzer is applicable to fields of radio communications, cable TV, teaching and automotive electronics etc. It can be used for performance measurement of RF components such as filter, amplifier, antenna, cable, and cable television sub connectors etc. It adopts Windows operating system, and has functions of error calibration, time domain and fixture simulator; It supports multiple display formats such as logarithmic amplitude, linear amplitude, standing wave, phase, group delay, Smith chart and polar coordinates etc.; It provides multiple calibration types including frequency response, single port, response isolation, enhanced response and full dual-port, rapid SOLT calibration and electrical calibration; It is capable of multi-channel and multi-window display; It is designed with USB interface, LAN interface, GPIB interface and VGA interface. It can rapidly and accurately measure the amplitude, phase and group delay characteristics of the DUT S-parameter, with efficient and powerful error correction capability.

■ Key Feature

- Dynamic range up to 125dB; accurate measurement on high rejection ratio devices
- 75Ω test port impedance option of 3656A for cable TV components measurement
- 3656D provide 4-port option which can accomplish all 16 S parameters test of 4-port net by a single connection
- Ultra-low trace noise which provide higher test accuracy
- Up to 64 independent measuring channels that can implement complex testing schemes rapidly
- Powerful data analysis functions, such as ripple test, bandwidth test and limit test, convenient for user to judge the conformity and improves the test efficiency
- Time domain analysis function as the standard configuration
- Fixture simulator can simulate various R&D situations to rapidly get the real-time test results
- LAN and GPIB interface, capable of remote control and system interconnection, 4 USB interfaces


Wide Dynamic Range

With dynamic range up to 125dB (IFBW=10Hz), 3656 is capable of accurate measurement on devices with high rejection ratio.

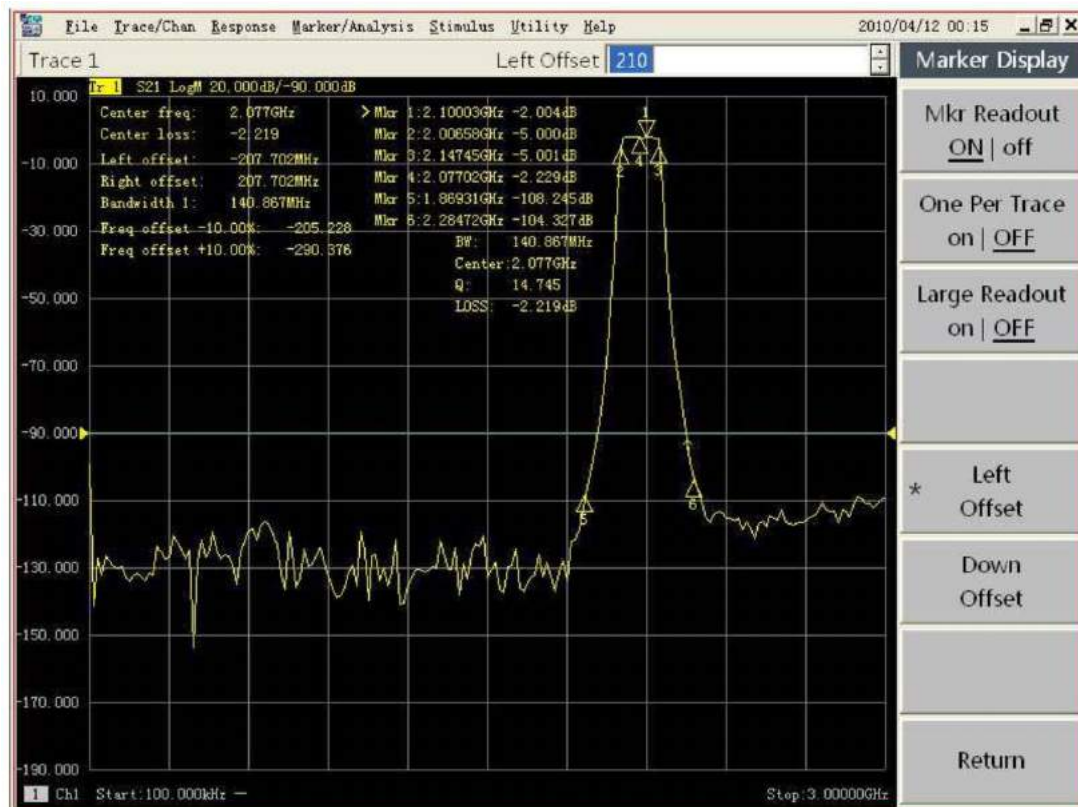


Ultra-low Trace Noise

Trace noise of 3656 is ultra-low, which minimizes measurement error.

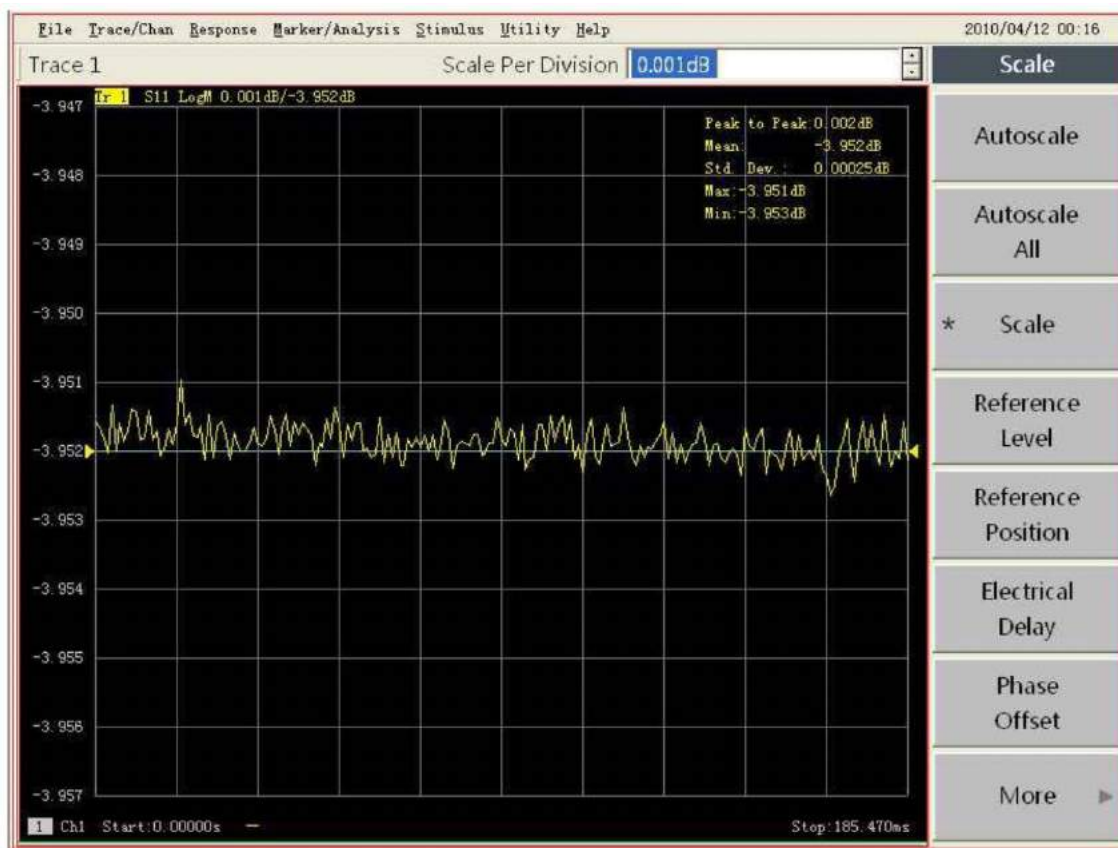


Time-domain Analysis Function

The analyzer can conduct time-domain measurement on DUT via time-domain software so as to comprehensively test the performance indicators of DUT, such as cable fault location and length measurement.

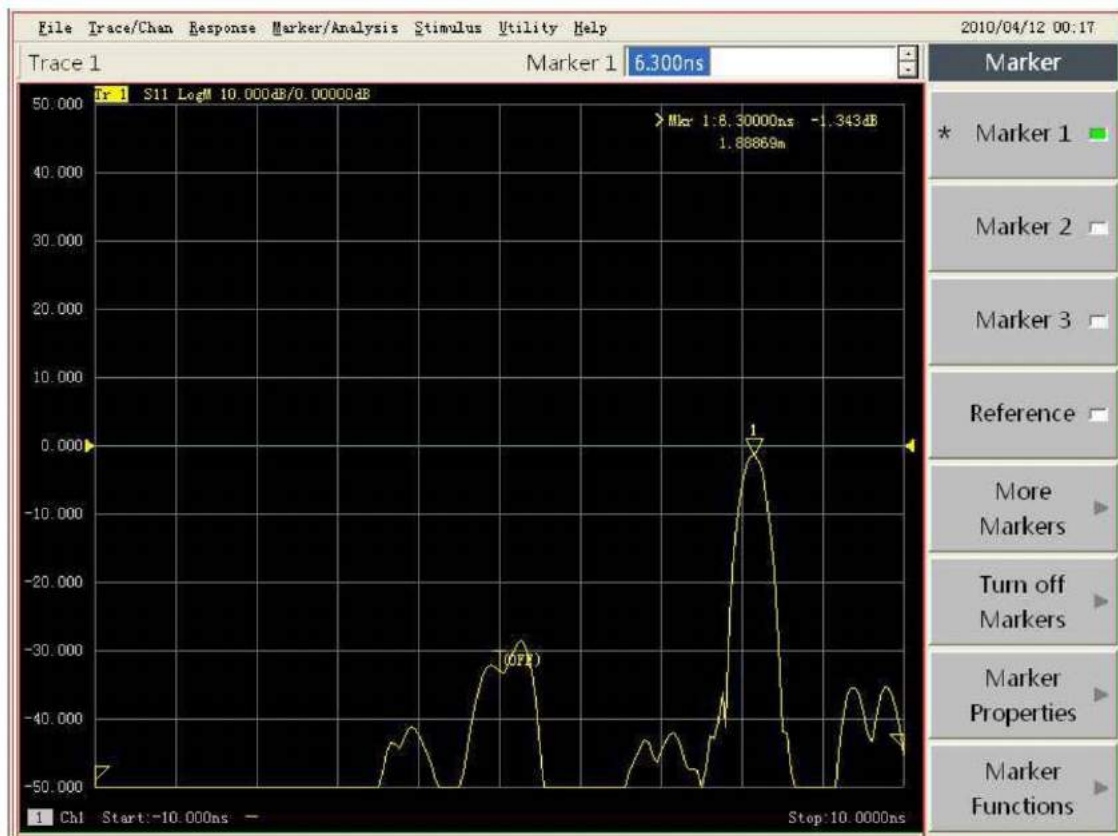

Powerful Data Analysis Function

It has analysis functions such as limit test, ripple test and bandwidth test, filter automatic statistics etc., which can clearly test the loss, ripple and rejection and help for conduct hopping filter debugging.

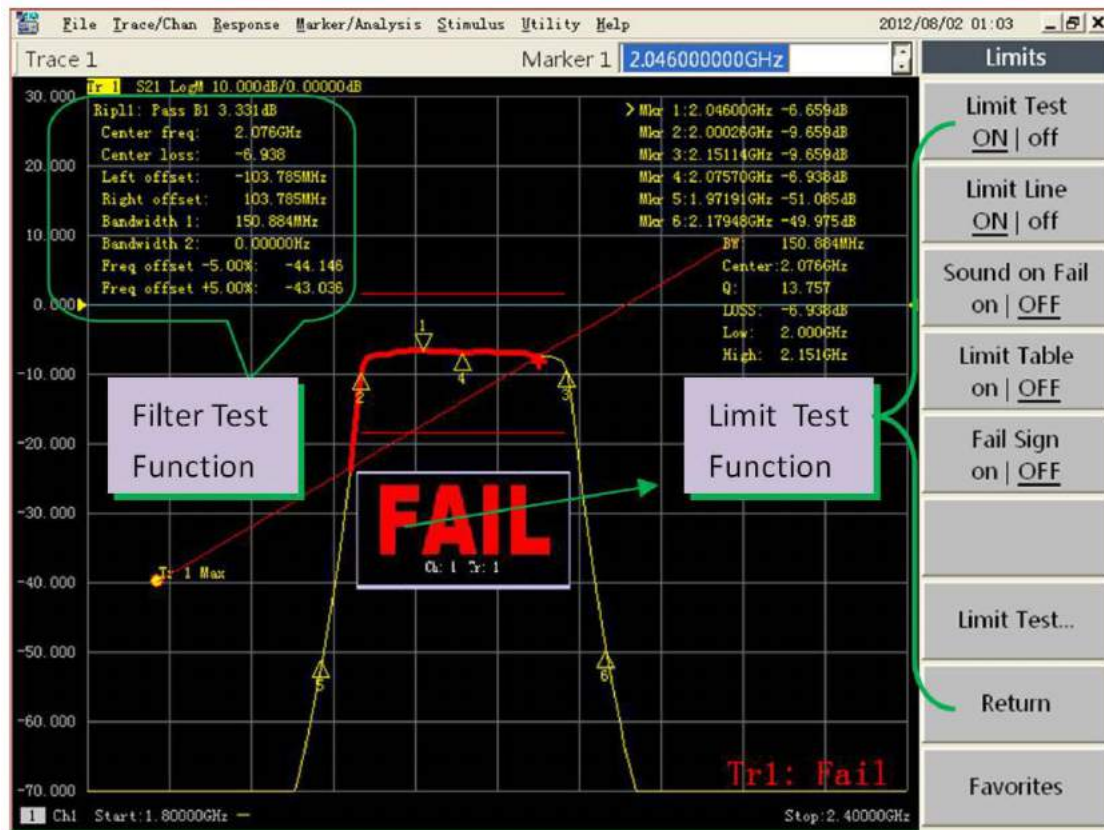

Typical Applications


Production Test of Mobile Communication Products

The frequency range of 3656 series vector network analyzer can meet the demand of production test on mobile communication products. It has advantages of high sweep speed, wide dynamic range and compact size which is very suitable for the test of mass production in factories. 3656 can be applied to the test of RF components such as filter, amplifier, antenna and cables. The 75Ω test assembly of 3656A is also available for performance test of CATV devices.



Test of passive multi-port device and balanced device

3656D VNA provide 4-port test function . It can test the whole 16 S parameters of 4-port network via one single connection, thus is very suitable for the mass production test of multi-port devices in factories. It has balanced parameter test function: after the full 3-port or full 4-port calibration using 3 or 4 test ports, choose the corresponding operation mode (single port-balanced network, single port-single port-balanced network, balanced-balanced network), then you can gain the mixed S-parameters of balanced devices.

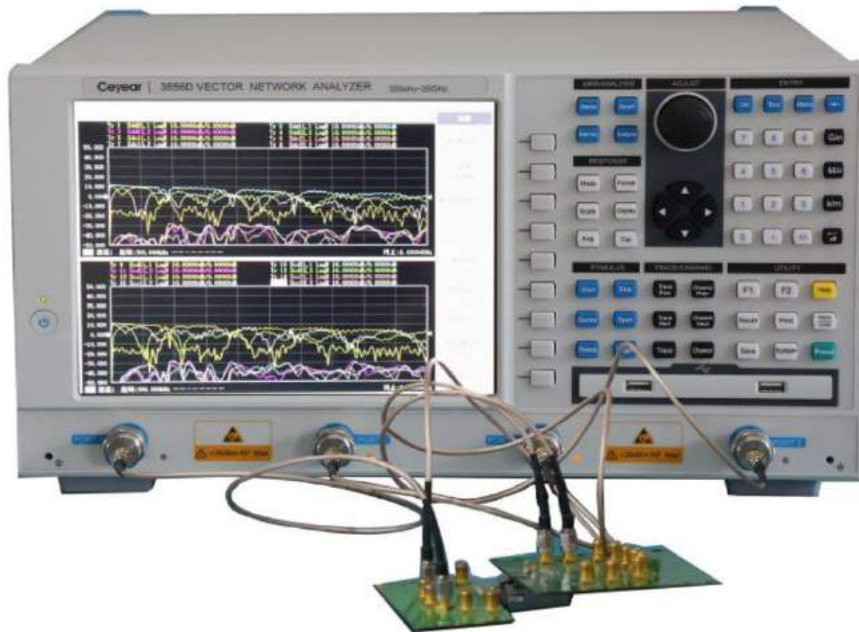

■ Specification

3656A/BA/B

Parameters	3656A	3656BA	3656B
Frequency range	100kHz-3GHz	100kHz-6.8GHz	100kHz-8.5GHz
Frequency resolution	1Hz	1Hz	1Hz
Frequency accuracy	$\pm 5 \times 10^{-6}$ (23°C $\pm 3^\circ\text{C}$)	$\pm 5 \times 10^{-6}$ (23°C $\pm 3^\circ\text{C}$)	$\pm 5 \times 10^{-6}$ (23°C $\pm 3^\circ\text{C}$)
System dynamic range	(10Hz) (3kHz) 100kHz-1MHz 90dB 60dB 1MHz-10MHz 110dB 80dB 10MHz-3GHz 125dB 95dB	(10Hz) (3kHz) 100kHz-20MHz 110dB 80dB 20MHz-3GHz 125dB 95dB 3GHz-6GHz 123dB 93dB 6GHz-6.8GHz 118dB 88dB	(10Hz) (3kHz) 100kHz-20MHz 110dB 80dB 20MHz-3GHz 125dB 95dB 3GHz-6GHz 123dB 93dB 6GHz-8.5GHz 118dB 88dB
Reflection track	100kHz-10MHz $\pm 0.030\text{dB}$ 10MHz-3GHz $\pm 0.020\text{dB}$	100kHz-3GHz $\pm 0.030\text{dB}$ 3GHz-6GHz $\pm 0.040\text{dB}$ 6GHz-6.8GHz $\pm 0.050\text{dB}$	100kHz-3GHz $\pm 0.030\text{dB}$ 3GHz-6GHz $\pm 0.040\text{dB}$ 6GHz-8.5GHz $\pm 0.050\text{dB}$
Transmission track	100kHz-10MHz $\pm 0.030\text{dB}$ 10MHz-3GHz $\pm 0.020\text{dB}$	100kHz-3GHz $\pm 0.030\text{dB}$ 3GHz-6GHz $\pm 0.040\text{dB}$ 6GHz-6.8GHz $\pm 0.050\text{dB}$	100kHz-3GHz $\pm 0.030\text{dB}$ 3GHz-6GHz $\pm 0.040\text{dB}$ 6GHz-8.5GHz $\pm 0.050\text{dB}$
Effective directivity	100kHz-10MHz 49 dB 10MHz-3GHz 46 dB 100kHz-10MHz 49dB (option H01) 10MHz-3GHz 46dB (option H01)	100kHz-3GHz 46dB 3GHz-6GHz 40dB 6GHz-6.8GHz 38dB	100kHz-3GHz 46dB 3GHz-6GHz 40dB 6GHz-8.5GHz 38dB
Effective source match	100kHz-10MHz 49 dB 10MHz-3GHz 46 dB 100kHz-10MHz 48dB (option H01) 10MHz-3GHz 41dB (option H01)	100kHz-3GHz 44dB 3GHz-6GHz 40dB 6GHz-6.8GHz 36dB	100kHz-3GHz 44dB 3GHz-6GHz 40dB 6GHz-8.5GHz 36dB

Parameters	3656A	3656BA	3656B
Test points	1 to 16001		
IF bandwidth	Min. 1Hz; Max. 5MHz, in 1, 2, 3, 5, 7 step		
Port connector type	Type-N (female) 50 ohm system impedance Type-N (female) 75 ohm system impedance(3656-H01)		
Number of test ports	2		
Reference level amplitude setting	Setting range: $\pm 500\text{dB}$ Setting resolution: 0.001dB		
Reference phase setting	Setting range: $\pm 500^\circ$ Setting resolution: 0.01°		
Time-base reference output	Output frequency: 10MHz Output level: +10dBm $\pm 4\text{dB}$		
Digital interface	GPIB, USB, Ethernet interface and VGA display interface		
Operation system	Windows XP		
Display	10.4-inch high brightness LCD		
Test domain	Frequency domain, Time domain		
Dimensions	435×233×348 (W×H×D) (including foot pad, foot, lateral stripping, input and output port)		
Power consumption	150W		
Power supply	50Hz single phase 220V or 50Hz/60Hz single phase 110V AC		
Weight	16kg		

3656D

Parameters	3656D		
Frequency range	300kHz~20GHz		
Frequency resolution	1Hz		
Frequency accuracy	$\pm 5 \times 10^{-6}$ (23°C $\pm 3^\circ\text{C}$)		
System dynamic range (IF bandwidth:10Hz)	Frequency range	2-port	4-port
	300kHz~100MHz	95dB	90dB
	100MHz~1GHz	110dB	100dB
	1GHz~6GHz	120dB	115dB
	6GHz~8GHz	117dB	110dB
	8GHz~10GHz	115dB	105dB
	10GHz~15GHz	110dB	100dB
	15GHz~20GHz	100dB	90dB
Reflection track	300kHz-10MHz	$\pm 0.030\text{dB}$	
	10MHz-3GHz	$\pm 0.040\text{dB}$	
	3GHz-20GHz	$\pm 0.050\text{dB}$	
Transmission track	300kHz-10MHz	$\pm 0.030\text{dB}$	
	10MHz-3GHz	$\pm 0.040\text{dB}$	
	3GHz-6GHz	$\pm 0.100\text{dB}$	
	6GHz-20GHz	$\pm 0.150\text{dB}$	
Effective directivity	300kHz-10MHz	46dB	
	10MHz-3GHz	42dB	
	3GHz-6GHz	38dB	
	6GHz-20GHz	36dB	
Effective source match	300kHz-10MHz	37dB	
	10MHz-3GHz	37dB	
	3GHz-6GHz	31dB	
	6GHz-20GHz	28dB	
Effective load match	300kHz-10MHz	44dB	
	10MHz-3GHz	42dB	
	3GHz-6GHz	38dB	
	6GHz-20GHz	36dB	

Parameters	3656D
Test points	1 to 16001
IF bandwidth	Min. 1Hz~Max. 5MHz, in 1, 2, 3, 5, 7 step
Port connector type	3.5mm (male) 50 ohm system impedance
Number of test ports	2/4
Reference level amplitude setting	Setting range:±500dB Setting resolution:0.001dB
Reference phase setting	Setting range:±500° Setting resolution:0.01°
Time-base reference output	Output frequency:10MHz Output level: +10dBm±4dB
Digital interface	GPIB, USB, Ethernet interface and VGA display interface
Operation system	Windows XP
Display	10.4-inch high brightness LCD
Test domain	Frequency domain, Time domain
Dimensions	436×236.5×410 (W×H×D) (including foot pad, foot, lateral stripping, input and output port)
Power consumption	150W
Power supply	50Hz single phase 220V or 50Hz/60Hz single phase 110V AC
Weight	18kg

Ordering Information

Model

Model	Name	Description
3656A	Vector Network Analyzer	100kHz~3GHz
3656BA	Vector Network Analyzer	100kHz~6.8GHz
3656B	Vector Network Analyzer	100kHz~8.5GHz
3656D	Vector Network Analyzer	300kHz~20GHz

Standard Package

No.	Description	Remarks
1	Power cord ,1 piece	Standard three core power cord
2	USB mouse, 1 piece	/
3	Quick start guide, 1 piece	/
4	Certificate of conformity , 1 piece	/

3656A Option Information

No.	Name	Description
3656-H01	75Ω port impedance system	After choosing this option, the main unit will not has 50Ω port impedance system
3656-H02	Type-N testing cable	GORE-OSZKU0240, dual male, 60cm
3656-H03	Type-N testing cable	GORE-OSZKUV0240, female male, 60cm
3656-H04	English options	Button, front panel, label;Notes:After choosing this option, the main unit will not has Chinese button,front panel,label
3656-H05	20205 Type-N calibration kit	For Calibration of the Analyzer(DC~50GHz)
3656-H06	20204 Type-N 75Ω calibration kit	/
3656-H07	Economical stable phase testing cable	CETC41-N/J.SMA/J.197C-800(N to 3.5mm connector, dual male, 80cm)
3656-H08	Economical stable phase testing cable	CETC41-N/J.N/K.197C-800(N type connector, female-male, 80cm)
3656-H09	Economical stable phase testing cable	CETC41-N/J.N/J.197C-800(N type connector, dual male, 80cm)
3656-H10	75Ω testing cable	24-0800-51M1-51M1

No.	Name	Description
3656-H11	20402 Electronic calibration kit	300kHz-18GHz, Type-N (female-male), 2-port
3656-H12	20403 Electronic calibration kit	10MHz-26.5GHz, 3.5mm (female-male), 2-port
3656-H13	20405 Electronic calibration kit	10MHz-20GHz, 3.5mm (female), 4-port
3656-H14	3656 series user manual in Chinese	/
3656-H15	3656 series user manual in English	/
3656-H16	Aluminum alloy transportation case	/
3656-H17	Front panel jumper	Supports 4-port extension and receiver through test
3656-H18	2813A 4-port test equipment	Need option 3656A-H17
3656-H19	Cabinet	Easy to build system

3656BA Option Information

No.	Name	Description
3656-H02	Type-N testing cable	GORE-OSZKU0240, dual male, 60cm
3656-H03	Type-N testing cable	GORE-OSZKUV0240, female-male, 60cm
3656-H07	Economical stable phase testing cable	CETC41-N/J.SMA/J.197C-800(Type-N to 3.5mm connector, dual male, 80cm)
3656-H08	Economical stable phase testing cable	CETC41-N/J.N/K.197C-800(Type-N connector,female-male, 80cm)
3656-H09	Economical stable phase testing cable	CETC41-N/J.N/J.197C-800(Type-N connector,dual male, 80cm)
3656-H11	20402 Electronic calibration kits	300kHz-18GHz, Type-N (female-male), 2 port
3656-H12	20403 Electronic calibration kits	10MHz-26.5GHz, 3.5mm(female-male), 2 port
3656-H13	20405 Electronic calibration kits	10MHz-20GHz, 3.5mm(female), 4 port
3656-H15	3656 series user manual in English	/
3656-H16	Aluminum transportation case	/
3656-H19	Cabinet	Easy to build system
3656-H20	English options	Button, front panel, label
3656-H21	20201 Type-N calibration kit	DC-9GHz
3656-H22	20202 3.5mm calibration kit	DC-9GHz
3656-S02	Production line test function option	for 3656BA only

3656B Option Information

No.	Name	Description
3656-H02	Type-N testing cable	GORE-OSZKU0240, dual male, 60cm
3656-H03	Type-N testing cable	GORE-OSZKUV0240, female-male, 60cm
3656-H07	Economical stable phase testing cable	CETC41-N/J.SMA/J.197C-800(Type-N to 3.5mm connector, dual male, 80cm)
3656-H08	Economical stable phase testing cable	CETC41-N/J.N/K.197C-800(Type-N connector,female-male, 80cm)
3656-H09	Economical stable phase testing cable	CETC41-N/J.N/J.197C-800(Type-N connector,dual male, 80cm)
3656-H11	20402 Electronic calibration kits	300kHz-18GHz, Type-N (female-male), 2 port
3656-H12	20403 Electronic calibration kits	10MHz-26.5GHz, 3.5mm(female-male), 2 port
3656-H13	20405 Electronic calibration kits	10MHz-20GHz, 3.5mm(female), 4 port
3656-H15	3656 series user manual in English	/
3656-H16	Aluminum transportation case	/
3656-H19	Cabinet	Easy to build system
3656-H20	English options	Button, front panel, label
3656-H21	20201 Type-N calibration kit	DC-9GHz
3656-H22	20202 3.5mm calibration kit	DC-9GHz
3656-H23	32111 waveguide calibration kit	1.72-2.61GHz

No.	Name	Description
3656-H24	32112 waveguide calibration kit	2.60-3.95GHz
3656-H25	32113 waveguide calibration kit	3.94-6.00GHz
3656-H26	32114 waveguide calibration kit	4.64-7.05GHz
3656-H27	32115 waveguide calibration kit	5.88-8.17GHz
3656-H28	32116 waveguide calibration kit	7.00-10.0GHz
3656-H29	Front panel jumper	Supports 4-port extension and receiver through test
3656-S01	Production line test function option	for 3656B only

3656D Option Information

No.	Name	Description
3656-H12	20403 Electronic calibration kits	/
3656-H13	20405 Electronic calibration kits	/
3656-H15	3656 series user manual in English	/
3656-H19	Cabinet	/
3656-H30	31121 3.5mm calibration kits	/
3656-H31	87308 3.5NMD/3.5mm-KJ testing cable	/
3656-H32	87308A 3.5NMD/3.5mm-KK testing cable	/
3656-H33	FB0HA0HB025.0 3.5mm GORE testing cable	/
3656-H34	FB0HA0HC025.0 3.5mm GORE testing cable	/
3656-H35	2-port English option	/
3656-H36	4-port option	/
3656-H37	4-port English option	/
3656-H38	Aluminum transportation case	/



Maxwellon Electronic Instruments Co.,LTD.

Factory: No.6 Xiangjiang Road, Qingdao 266000, China
Tel: 0086 13816527810

Sales Office: NO.153 Zhuzhou Rd.,Laoshan District, Qingdao 266100, China.
Tel: 0086-532-80977508
Fax: 0086-532-80977508

Sales: Sales@Maxwellon.com
Web: www.maxwellon.com